\odot

PUMATH BUNGEE LAUNCH SYSTEM

AeroVironment's Bungee Launch System (BLS) allows for easy launch of Puma[™] 2 AE, Puma[™] 3 AE, or Puma[™] LE aircraft in environmental scenarios where a hand launch is not preferred. Constructed from military grade bungee cord material, with a 90 ft pull length, the BLS is lightweight, portable, all environment rated, and can be set up and operational in less than 10 minutes. With multiple ground fastener options included, the BLS can be securely installed in a variety of soil types or mounted to low, immovable objects for mission flexibility. The BLS comes packaged in a weatherproof case that includes everything needed to transport, install, and operate the system. The BLS is standard equipment with every Puma[™] LE system, and is available as an optional equipment accessory for Puma[™] 2 AE and Puma[™] 3 AE configurations.




Easy Launch of Puma[™] 2 AE, Puma[™] 3 AE, and Puma[™] LE

PUMA" BUNGEE LAUNCH SYSTEM

SPECIFICATIONS

COMPATIBILITY	Puma™ 2 AE, Puma™ 3 AE, Puma™ LE		alitic statistic o
MAX LAUNCH Altitude	10k ft density altitude		IF GOD
DIMENSIONS PACKED Bungee Launch System	Pelican Case: 21.2 in x 16 in x 10.6 in (53.8 cm x 40.6 cm x 27 cm)		
BUNGEE LAUNCH System weight	40 lb (18 kg)	Bungee Launch System components	
BUNGEE STRETCH Length	90 ft (27 m) from secure point to aircraft attachment, includes leadline		
OBSTACLE CLEARANCE FROM Release point in standard Configuration (SEA LEVEL)	Puma [™] 2 AE and Puma [™] 3 AE: Can clear 50 ft (15 m) obstacle at 394 ft (120 m) Puma [™] LE: Can clear 50 ft (15 m) obstacle at 279 ft (85 m) Note: Distances can vary as they depend on environmental conditions		
TEMPERATURE CAPABILITY	-29 to +49 °C		CAURENTINE C
LAUNCH WEIGHT Capability	Puma™ 2 AE and Puma™ 3 AE: 19 lb (8.6 kg) Puma™ LE: 27 lb (12.2 kg)	Bungee Adapter for Puma™ 2 AE and Puma™ 3 AE	Packed Bungee Launch System
Operational Requirements*			

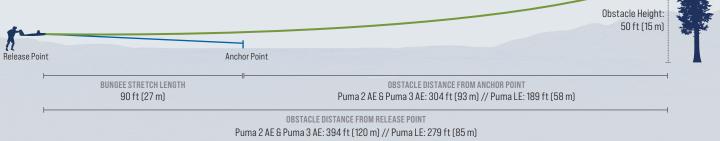

Zero wind conditions. Not recommended launching with a tailwind.



Puma[™] 2 AE and Puma[™] 3 AE mounting bracket



Puma™ LE mounting bracket

Kizilirmak Mah. 1446. Cad. No: 12/18 Cukurambar 06530 Cankaya, Ankara / TURKEY Tel : +90 (312) 284 30 12 (PBX) Fax : +90 (312) 284 30 14 altoy@altoy.com.tr www.altoy.com.tr

